




EV is the next generation of ProGrowTech's Evolve Series, offering cultivators state-of-the-art features to custom craft their harvest and improve energy efficiency.

## EV Series Specifications:

### EV360-C

#### Compact Bloom Fixture

Don't be fooled by its smaller footprint: EV360-C produces optimal light for the flower phase. Ideal for smaller spaces, this fixture combines the features of our EV700 into a compact package, maximizing harvests and crop quality while reducing energy consumption.

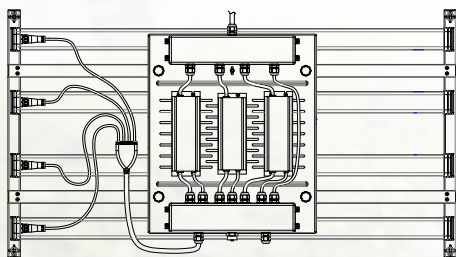


42"

24"

### Performance Summary

- Peak power: 340W
- Coverage area: 2'x4'
- PPF: 850
- BTU: 1,173
- Light distribution: 120°
- Dimensions: 42"x24"x4.5"
- Weight: 30 lbs
- LED bars: 4
- Efficiency: 2.5  $\mu\text{mol/J}$

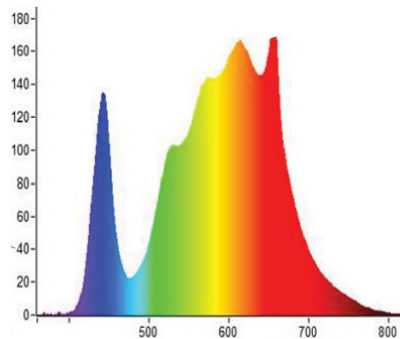

- Input voltage: 100-277V, 347V, 480V\*
- LED lifetime: L90: > 50,000 hrs
- Thermal management: Passive
- Operating temp.: 0-50C
- Power factor: 0.9 nominal
- Mounting height: 6"-36"
- Connectivity: 3 channel 0-10V dimming
- Spectrum: 3,000K, 6,500K, 660NM
- Uniformity: 1:1.8 min/max
- Dimming control: 0-100% per channel
- Water/Dust CRI: IP66
- ETL/UL certification: UL880, DLC
- CCT: 92/Variable - 3 channels
- Warranty: 5 years

Amp Calculations	
VOLTAGE	AMPS
110V	3.09A
220V	1.54A
240V	1.42A
277V	1.23A
480V	0.71A

